

DS144-33BKH

Dome Splice Closure Heat Shrinkable Seal 05 Ports 144 Cores

Features


- ◆ The closure adopts heat shrinkable sealing structure. There is one big oval shaped inlet/outlet port in base.
- ◆ The big oval shaped port is used for the sealing of uncut straight-through fiber cable.
- ◆ The small ports are used for branch fiber cable and drop cable.
- ◆ The patented sealing structure keep good sealing performance after re-entry and re-using.
- ◆ The bending radius of FOSTs meet the international standard.
- ◆ It could save the installation time and improve work efficiently.
- ◆ Degrees of protection is up to IP68.



Application

- ◆ Suitable for bunchy fibers.
- ◆ Aerial, underground, wall mounting, hand hole-mounting and duct-mounting.

Dimension

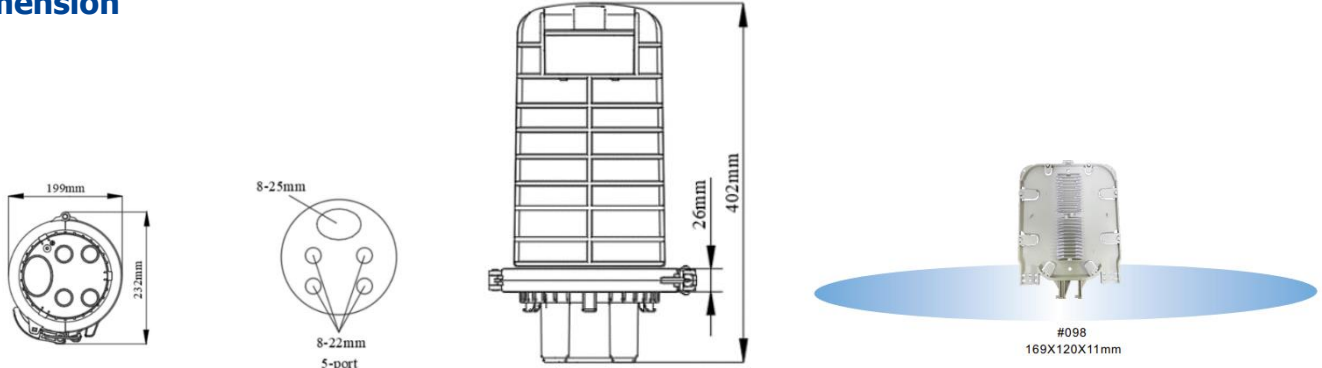

Specification

1	Closure Capacity:	144 Cores
2	Cable Port:	1*big oval port: $\Phi 8-\Phi 25\text{mm}$ 4*small round port: $\Phi 8-\Phi 22\text{mm}$
3	Material:	PP
4	Protection Grade:	IP68
5	Mounting Method:	Aerial, Wall, Pole, Underground
6	Splice Trays	6pcs (24f per tray)
7	Dimension:	H402mm*D199 mm
8	Operation temperature:	-40~+65 °C

