

DS144-33BKM DS288-33BKM

Dome Splice Closure Mechanical Seal 06 Ports 144/288 Cores

Features


- ◆ Advanced internal structure design.
- ◆ Easy and fast to fix fiber cable.
- ◆ Fiber suffers no attenuation.
- ◆ The closure is spacious enough for winding and storing fibers.
- ◆ Fiber Optic Splice Trays (FOSTs) are design in SLIDE-INLOCK and its opening angle is about 90°.
- ◆ The curved diameter meets with international standard.
- ◆ Easy and fast to increase and reduce FOSTs.
- ◆ Innovative elastic intergrated seal fitting.



Application

- ◆ Suitable for bunchy fibers.
- ◆ Aerial, underground

Dimension

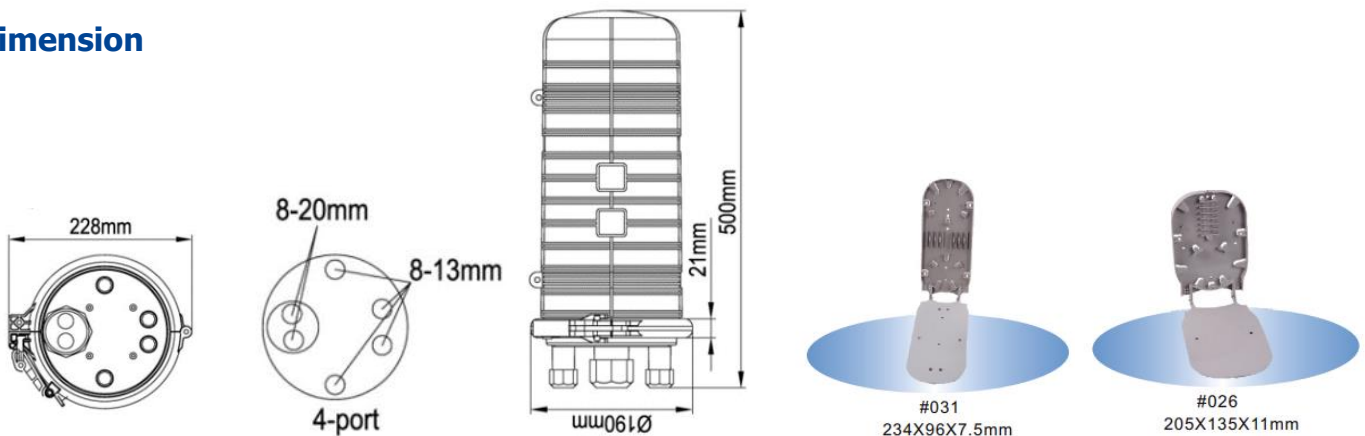

Specification

1	Closure Capacity:	144 Cores	288 Cores
2	Cable Port:	2*round port: $\Phi 8$ - $\Phi 20$ mm 4*round port: $\Phi 8$ - $\Phi 13$ mm	
3	Material:	PP	
4	Protection Grade:	IP68	
5	Mounting Method:	Aerial, Wall, Pole, Underground	
6	Splice Trays	12pcs (12f per tray)	4pcs (72f per tray)
7	Dimension:	H500mm*D190mm	
8	Operation temperature:	-40~+65 °C	

