

DS24-22BKH DS48-22BKH

Dome Splice Closure Heat Shrinkable 04 Ports 24/48 Cores

Features


- Advanced internal structure design.
- Easy to re-enter, it never requires re-entry tool kit.
- The closure is spacious enough for winding and storing fibers.
- Fiber Optic Splice Trays (FOSTs) are design in SLIDE-IN-LOCK and its opening angle is about 90°.
- The curved diameter meets with international standard.
- Easy and fast to increase and reduce FOSTs.
- Innovative elastic intergrated seal fitting.
- The FOST base is provided with an oval inlet/outlet port.



Application

- Suitable for bunchy fibers.
- Aerial, underground, wall-mounting, hand hole-mounting Pole-mounting and duct-mounting

Dimension

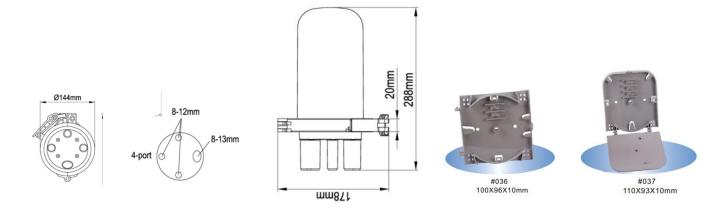

Specification

1	Closure Capacity:	24 Cores	48 Cores
2	Cable Port:	1*Oval port: Φ8-Φ13mm 3*round port: Φ8-Φ12mm	
3	Material:	PP	
4	Protection Grade:	IP68	
5	Mounting Method:	Aerial, Wall, Pole, Underground	
6	Splice Trays	3pcs (4-8f per tray)	4pcs (6-12f per tray)
7	Dimension:	H288mm*D144mm	
8	Operation temperature:	-40~+65 °C	

