

## DS24-22BKM & DS48-22BKM

### Dome Splice Closure Mechanical Seal 04 Ports 24/48 Cores

#### Features


- ◆ Advanced internal structure design
- ◆ Easy and fast to fix fiber cable
- ◆ The closure is spacious enough for winding and storing fibers
- ◆ Fiber Optic Splice Trays (FOSTs) are design in SLIDE-INLOCK and its opening angle is about 90°
- ◆ The curved diameter meets with international standard
- ◆ Easy and fast to increase and reduce FOSTs
- ◆ Innovative elastic intergrated seal fitting



#### Application

- ◆ Suitable for bunchy fibers
- ◆ Underground, wall-mounting, hand hole-mounting Pole-mounting and duct-mounting

#### Dimension

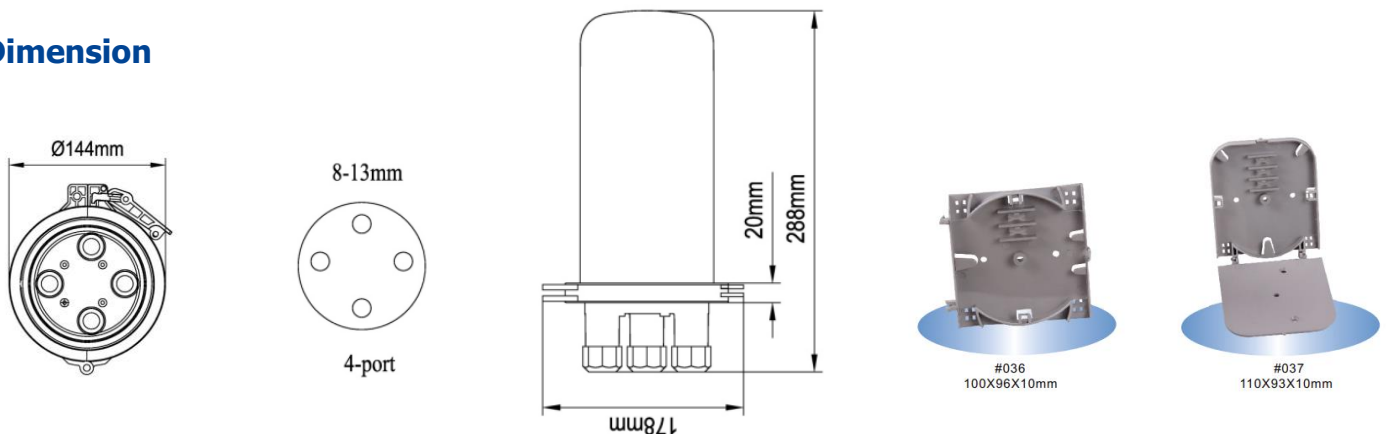

#### Specification

1	Closure Capacity:	24 Cores	48 Cores
2	Cable Port:	4*round port: $\Phi 8$ - $\Phi 13$ mm	
3	Material:	PP	
4	Protection Grade:	IP68	
5	Mounting Method:	Aerial, Wall, Pole, Underground	
6	Splice Trays	3pcs (4-8f per tray)	4pcs (6-12f per tray)
7	Dimension:	H288mm*D144mm	
8	Operation temperature:	-40~+65 °C	

