

DS432-44BKH DS864-44BKH

Dome Splice Closure Heat Shrinkable 07 Ports 432/864 Cores

Features


- ◆ Advanced internal structure design.
- ◆ Easy to re-enter, it never requires re-entry tool kit.
- ◆ The closure is spacious enough for winding and storing fibers.
- ◆ Fiber Optic Splice Trays(FOSTs) are design in SLIDE-IN-LOCK and its opening angle is about 90°.
- ◆ The curved diameter meets with international standard.
- ◆ Easy and fast to increase and reduce FOSTs.
- ◆ Innovative elastic intergrated seal fitting.
- ◆ The FOST base is provided with an oval inlet/outlet port.



Application

- ◆ Suitable for bunchy fibers.
- ◆ Aerial, underground, wall-mounting, hand hole-mounting Pole-mounting and duct-mounting

Dimension

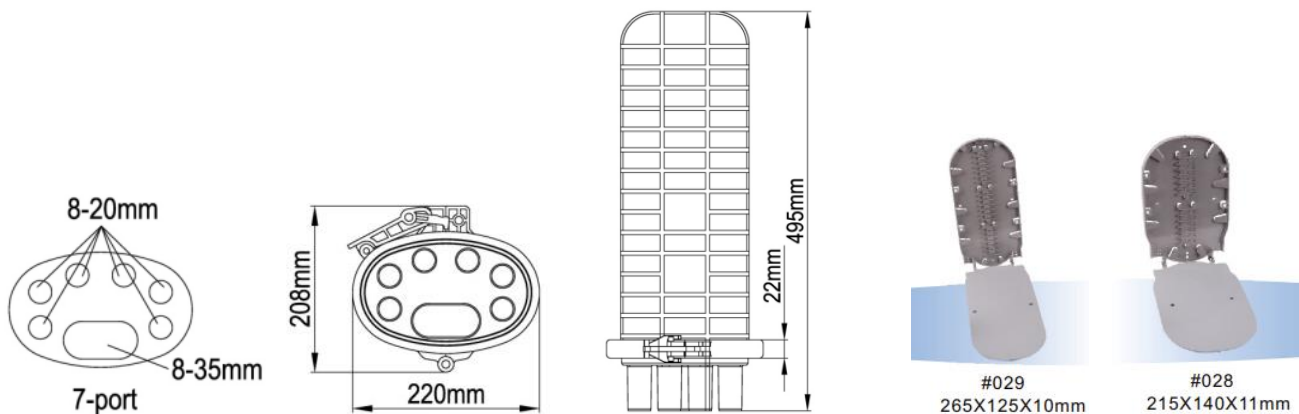

Specification

1	Closure Capacity:	432 Cores	864 Cores
2	Cable Port:	1*Oval port: $\Phi 8\text{-}\Phi 35\text{mm}$ 7*round port: $\Phi 8\text{-}\Phi 20\text{mm}$	
3	Material:	PP	
4	Protection Grade:	IP68	
5	Mounting Method:	Aerial, Wall, Pole, Underground	
6	Splice Trays	6pcs (36-72f per tray)	6pcs (144f per tray)
7	Dimension:	H495mm*D220mm	
8	Operation temperature:	-40~+65 °C	

