

DS72-22BKM DS96-22BKM

Dome Splice Closure Mechanical Seal 04 Ports 72/96 Cores

Features


- ◆ Advanced internal structure design
- ◆ Easy and fast to fix fiber cable
- ◆ Fiber suffers no attenuation
- ◆ The closure is spacious enough for winding and storing fibers.
- ◆ Fiber Optic Splice Trays (FOSTs) are design in SLIDE-IN-LOCK and its opening angle is about 90°.
- ◆ The curved diameter meets with international standard.
- ◆ Easy and fast to increase and reduce FOSTs.
- ◆ Innovative elastic intergrated seal fitting.



Application

- ◆ Suitable for bunchy fibers.
- ◆ Aerial, underground, wall mounting, hand hole-mounting and duct-mounting.

Dimension

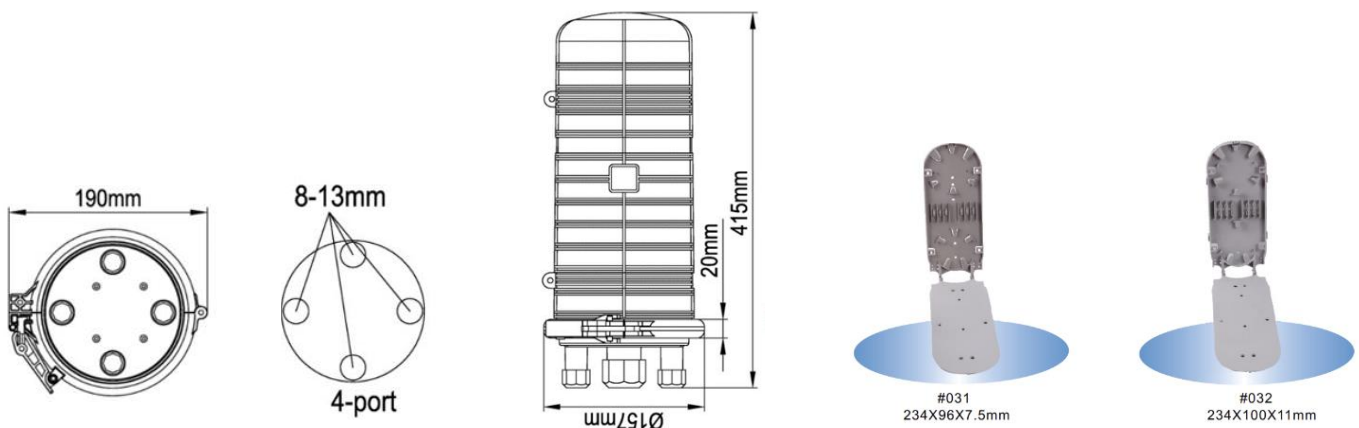

Specification

1	Closure Capacity:	72 Cores	96 Cores
2	Cable Port:	4*round port: $\Phi 8$ - $\Phi 13$ mm	
3	Material:	PP	
4	Protection Grade:	IP68	
5	Mounting Method:	Aerial, Wall, Pole, Underground	
6	Splice Trays	6*12F	8*12F 4*24F
7	Dimension:	H415mm*D157 mm	
8	Operation temperature:	-40~+65 °C	

