


## FOFCSx-09

### 09 TYPE FAST FIELD CONNECTOR

#### Features

- ◆ Fast and easy on-site installation with stability
- ◆ Eliminated field polishing
- ◆ No adhesives or electrical power required
- ◆ Reduced connection defect rate by re-assembling
- ◆ Compatible with 3\*2mm flat cable

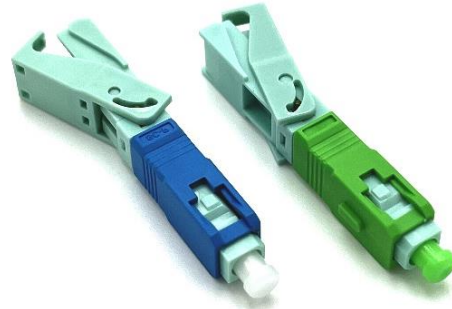

#### General

Interface	SC/APC (Green) SC/UPC (Blue)
Splice Type	Mechanical
Fiber Mode	Single-mode

#### Dimensions

Cable Compatible	3.0*2.0 mm Flat
Connector Size	53.5*9*7.3 mm

#### Technical

Operating Temperature	-40 °C to +85 °C
Cable Retention Strength	35N Min.
Insertion Loss	≤0.3dB
Return Loss	≥55dB (APC) ≥50dB (UPC)
On-line Tensile Strength	20N (ΔIL≤0.3dB)
Mechanical Durability	500 times (ΔIL≤0.3dB)
Drop-off Test	4M*3 times (ΔIL≤0.3dB)
Reusable	>10 times

#### Compliance

Applicable Standards	RoHS2.0 IEC61754-4
----------------------	-----------------------

