


## PC01Fxx30L-TUTU

### SIMPLEX OM2 PATCH CORD ST/UPC-ST/UPC LSZH 3.0MM

#### Features

- ◆ Single fiber design for unidirectional communication.
- ◆ Multi-mode fiber for cost-effective short-distance communication.
- ◆ Low insertion loss for minimal signal distortion.
- ◆ Protective outer jacket for additional durability.
- ◆ Easy to install and use for efficient fiber optic installations.

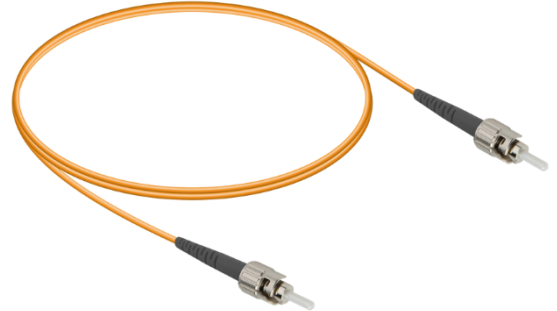

#### General

Interface, Connector A  
Interface, Connector B  
Fiber Type  
Fiber Count  
Jacket Material

ST/UPC  
ST/UPC  
OM2  
Simplex  
LSZH

#### Dimensions

Length  
Cable Diameter

Customized  
3.0 mm

#### Technical

Storage Temperature  
Operating temperature  
Insertion Loss  
Return Loss  
Interchangeability  
Durability

-40°C to 85°C  
-20°C to 85°C  
≤ 0.2 dB (IEC 61300-3-4)  
≥ 35 dB (IEC 61300-3-6)  
≤ 0.2 dB  
>1000 times

#### Compliance

Applicable  
Standards

RoHS2.0  
Telcordia GR-326-CORE

