


PC01Gxx30L-SUSU

SIMPLEX OM3 PATCH CORD SC/UPC-SC/UPC LSZH 3.0MM

Features

- ◆ Single fiber design for unidirectional communication.
- ◆ Multi-mode fiber for cost-effective short-distance communication.
- ◆ Low insertion loss for minimal signal distortion.
- ◆ Protective outer jacket for additional durability.
- ◆ Easy to install and use for efficient fiber optic installations.

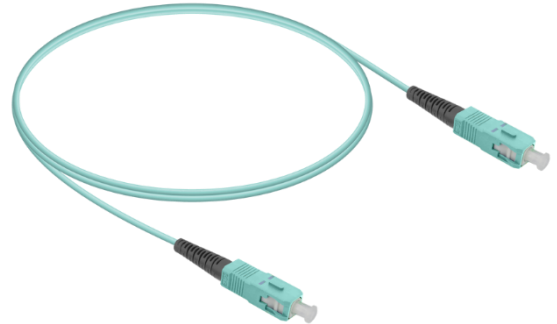

General

Interface, Connector A
Interface, Connector B
Fiber Type
Fiber Count
Jacket Material

SC/UPC
SC/UPC
OM3
Simplex
LSZH

Dimensions

Length
Cable Diameter

Customized
3.0 mm

Technical

Storage Temperature
Operating temperature
Insertion Loss
Return Loss
Interchangeability
Durability

-40°C to 85°C
-20°C to 85°C
≤ 0.2 dB (IEC 61300-3-4)
≥ 35 dB (IEC 61300-3-6)
≤ 0.2 dB
>1000 times

Compliance

Applicable
Standards

RoHS2.0
Telcordia GR-326-CORE

