


## PC01yxx30L-FUFA

### SIMPLEX PATCH CORD FC/UPC-FC/APC LSZH 3.0MM

#### Features

- ◆ Single-mode single-fiber for signal transmission.
- ◆ Low insertion loss due to small fiber core diameter.
- ◆ High-speed transmission (1Gbps, 10Gbps, etc.) for data centers and enterprise networks.
- ◆ Long-distance transmission supported by single-mode fiber.
- ◆ High reliability with a single fiber core to reduce the risk of transmission failures.

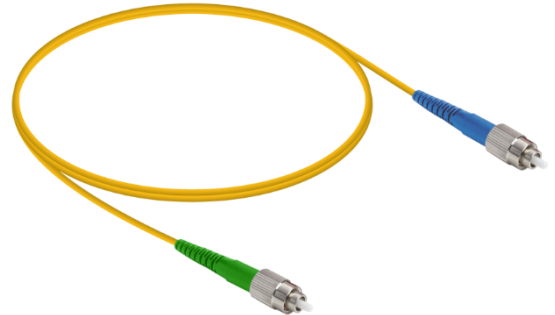

#### General

Interface, Connector A  
Interface, Connector B  
Fiber Type  
Fiber Count  
Jacket Material

FC/UPC  
FC/APC  
G652D/G657  
Simplex  
LSZH

#### Dimensions

Length  
Cable Diameter

Customized  
3.0 mm

#### Technical

Storage Temperature  
Operating temperature  
Insertion Loss  
Return Loss

-40°C to 85°C  
-20°C to 85°C  
≤ 0.3 dB (IEC 61300-3-4)  
≥ 50/60 dB (UPC/APC)  
(IEC 61300-3-6)  
≤ 0.2 dB  
>1000 times

Interchangeability  
Durability

#### Compliance

Applicable  
Standards

RoHS2.0  
Telcordia GR-326-CORE

