


PC01yxx30L-SUSA

SIMPLEX PATCH CORD SC/UPC-SC/APC LSZH 3.0MM

Features

- ◆ Single-mode single-fiber for signal transmission.
- ◆ Low insertion loss due to small fiber core diameter.
- ◆ High-speed transmission (1Gbps, 10Gbps, etc.) for data centers and enterprise networks.
- ◆ Long-distance transmission supported by single-mode fiber.
- ◆ High reliability with a single fiber core to reduce the risk of transmission failures.

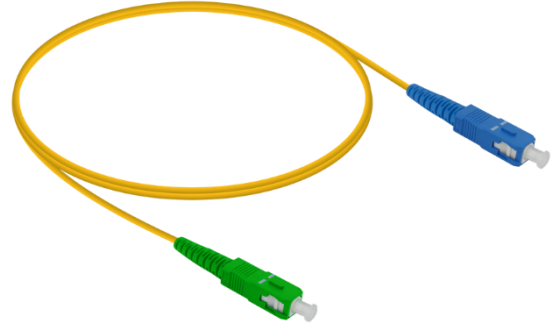

General

Interface, Connector A
Interface, Connector B
Fiber Type
Fiber Count
Jacket Material

SC/UPC
SC/APC
G652D/G657
Simplex
LSZH

Dimensions

Length
Cable Diameter

Customized
3.0 mm

Technical

Storage Temperature
Operating temperature
Insertion Loss
Return Loss

Interchangeability
Durability

-40°C to 85°C
-20°C to 85°C
≤ 0.3 dB (IEC 61300-3-4)
≥ 50/60 dB (UPC/APC)
(IEC 61300-3-6)
≤ 0.2 dB
>1000 times

Compliance

Applicable
Standards

RoHS2.0
Telcordia GR-326-CORE

