


## PC02yxx30L-FUFA

### DUPLEX PATCH CORD FC/UPC-FC/APC LSZH 3.0MM

#### Features

- ◆ Duplex design for bidirectional communication.
- ◆ High-quality single-mode fiber for stable signal transmission.
- ◆ Low insertion loss for minimal signal distortion.
- ◆ Protective outer jacket for additional durability.
- ◆ Easy to install and use for efficient fiber optic installations.

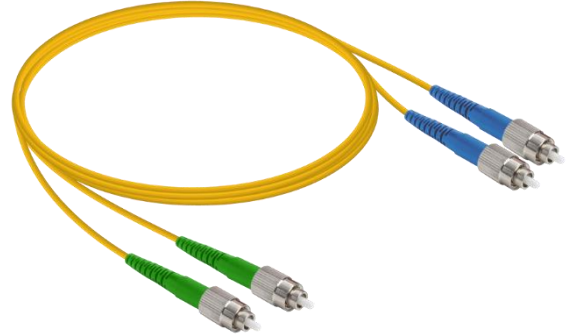

#### General

Interface, Connector A  
Interface, Connector B  
Fiber Type  
Fiber Count  
Jacket Material

FC/UPC  
FC/APC  
G652D/G657  
Duplex  
LSZH

#### Dimensions

Length  
Cable Diameter

Customized  
3.0 mm

#### Technical

Storage Temperature  
Operating temperature  
Insertion Loss  
Return Loss

-40°C to 85°C  
-20°C to 85°C  
≤ 0.3 dB (IEC 61300-3-4)  
≥ 50/60 dB (UPC/APC)  
(IEC 61300-3-6)

Interchangeability  
Durability

≤ 0.2 dB  
>1000 times

#### Compliance

Applicable  
Standards

RoHS2.0  
Telcordia GR-326-CORE

