


PC02yxx30L-SAFU

DUPLEX PATCH CORD SC/APC-FC/UPC LSZH 3.0MM

Features

- ◆ Duplex design for bidirectional communication.
- ◆ High-quality single-mode fiber for stable signal transmission.
- ◆ Low insertion loss for minimal signal distortion.
- ◆ Protective outer jacket for additional durability.
- ◆ Easy to install and use for efficient fiber optic installations.

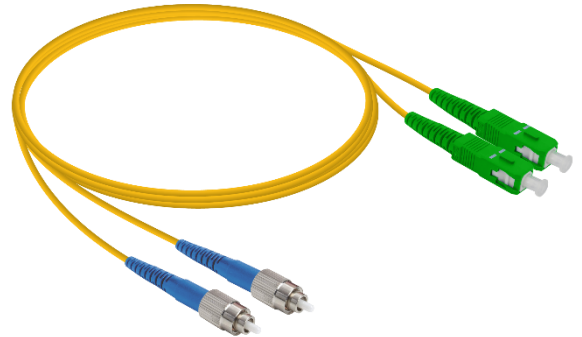

General

Interface, Connector A
Interface, Connector B
Fiber Type
Fiber Count
Jacket Material

SC/APC
FC/UPC
G652D/G657
Duplex
LSZH

Dimensions

Length
Cable Diameter

Customized
3.0 mm

Technical

Storage Temperature
Operating temperature
Insertion Loss
Return Loss

-40°C to 85°C
-20°C to 85°C
≤ 0.3 dB (IEC 61300-3-4)
≥ 50/60 dB (UPC/APC)
(IEC 61300-3-6)

Interchangeability
Durability

≤ 0.2 dB
>1000 times

Compliance

Applicable
Standards

RoHS2.0
Telcordia GR-326-CORE

