


PT01Gxx09L-LU

SIMPLEX OM3 PIGTAIL LC/UPC LSZH 0.9MM

Features

- ◆ Multimode single-fiber design for unidirectional signal transmission.
- ◆ Cost-effective solution compared to single-mode fiber optic patch cables.
- ◆ High bandwidth transmission for applications such as 1Gbps, 10Gbps, or higher data rates.
- ◆ Suitable for short-distance transmission, such as inter-cabinet or inter-floor connections.
- ◆ Simplified cabling with reduced fiber connectors, ideal for quick and easy installations.

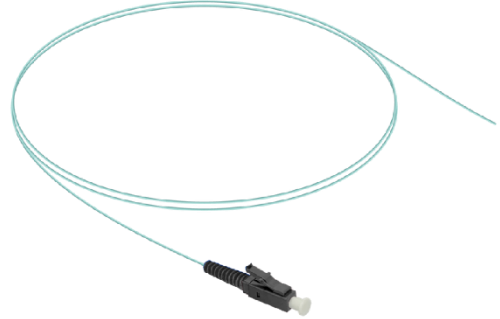

General

Interface, Connector
Fiber Type
Fiber Count
Jacket Material

LC/UPC
OM3
Simplex
LSZH

Dimensions

Length
Cable Diameter

Customized
0.9 mm

Technical

Storage Temperature
Operating temperature
Insertion Loss
Return Loss
Interchangeability
Durability

-40°C to 85°C
-20°C to 85°C
≤ 0.2 dB (IEC 61300-3-4)
≥ 35 dB (IEC 61300-3-6)
≤ 0.2 dB
>1000 times

Compliance

Applicable
Standards

RoHS2.0
Telcordia GR-326-CORE

